

IMPLEMENTATION OF A CULINARY TOURISM RECOMMENDATION SYSTEM FOR MEDAN CITY USING THE COLLABORATIVE FILTERING METHOD

Aidillia Adha Hasibuan¹, M. Khalil Gibran², Mhd Ikhsan Rifki³, Klause Roder⁴

¹Department of Information System, Universitas Amikom, Yogyakarta, Indonesia

^{2,3}Department of Computer Science, Universitas Islam Negeri Sumatera Utara, Medan, Indonesia

⁴Department of Applied Mathematics, Universty of Ausburg, Ausburg, Germany

Article Info

Article history:

Received : July 07, 2024

Revised : September 25, 2024

Accepted : December 07, 2024

Keywords:

Collaborative Filtering;

K-Means;


Pearson Correlation Coefficient;

Recommendation System.

ABSTRACT

Culinary tourism has its own appeal for tourists visiting an area, but the tourists who come may not necessarily know the culinary offerings in that area, so a system is needed that can provide recommendations to tourists. A recommendation system is a system that can provide suggestions to its users regarding a particular item, and the suggestions given are used in various decision-making processes. The method used is Collaborative Filtering. The problem is how to apply the Collaborative Filtering method to recommend food with many influencing factors, resulting in a relevant recommendation. The recommendation process involves grouping users into a specific group through the clustering process using the K-Mean method, after which the software calculates the similarity between the user and the group members. The calculation of similarity between users and their group members uses the Pearson correlation coefficient formula. The determination of the recommendation results provided uses a ranking system with the highest recommendation values. The data used consists of 18 food data, 100 training data, and 10 testing data. The results of the relevance percentage test reached 80%.

This is an open access article under the [CC BY-SA](https://creativecommons.org/licenses/by-sa/4.0/) license.



Corresponding Author:

Aidillia Adha Hasibuan,

Department of Information System,

Universitas Amikom

Email: aidilliahsb22@gmail.com

1. INTRODUCTION

Collaborative filtering is a subfield of machine learning used to create algorithms that can predict customer preferences based on the activities of a group of customers, such as purchases or ratings given to a product or item [1] [2]. Collaborative filtering will work by collecting user behavior, differences and similarities among users in a specific domain, and providing results to users in the form of ratings for items in that domain [3] [4] [5].

In recent years, extensive research has been undertaken on the application of collaborative filtering systems. The research conducted by [6] employed user similarity aggregation to enhance the efficacy of the collaborative filtering technique for user-rating data [7].

A separate investigation into the collaborative filtering method, as detailed in [8], demonstrates the implementation of this technique alongside the k-nearest neighbor graph to enhance the efficiency of recommendation generation and minimize system execution duration [9] [10].

Recommendation systems are extensively utilized across several domains, such as the tourism sector, where they offer choices for tourist sites based on visual matching and user inputs [11]. This study will present recommendations derived from user patterns or behaviors seen within the system [12] [13].

Building on prior studies demonstrating the efficacy of collaborative filtering in recommending tourist destinations and news articles, the researcher seeks to apply this strategy to meal recommendations [14]. Numerous factors influence meal recommendations, including personal preferences, individual behaviors, and diverse cultural backgrounds [15]. The researchers want to determine the applicability of the collaborative filtering method in meal suggestions, considering various affecting aspects [16].

This project seeks to assess the significance of recommendation outcomes derived from the collaborative filtering process within the Medan City Culinary Tourism Recommendation System and to identify an algorithm capable of suggesting meal options [17].

2. RESEARCH METHOD

a. Collaborative Filtering

Collaborative filtering is a subset of machine learning that develops algorithms that forecast customer preferences based on the behaviors of a collective of customers, such purchases or ratings assigned to a product or item [1].

El filtrado colaborativo es una metodología utilizada en sistemas de recomendación que ha sido ampliamente implementada en muchas aplicaciones. El filtrado colaborativo postula que los usuarios con preferencias análogas exhibirían selecciones similares. Funciona agregando el comportamiento de los usuarios, las distinciones y las similitudes dentro de un dominio designado, y posteriormente entregando resultados a los usuarios en forma de calificaciones de artículos dentro de esa área [2].

b. K-Means

K-means clustering is a partitioning method that functions to divide a data set of N items into k disjoint subsets S_j containing N_j items so that they are close according to a certain distance measure. Each cluster is determined by N_j members and the centroid λ_j . The centroid of each cluster is the point that minimizes the total distance of all items [5].

The k-means algorithm works by randomly selecting k centroids, with the number of centroids indicating the number of clusters. Next, all items from the subset S_j will be placed into the cluster with the nearest centroid. The centroid of each cluster will be updated based on the items within that cluster. This operation will continue until the value of the centroid does not change [6].

c. Recall and Precision

The computation of recall and precision is predicated on the software's suggestions, encompassing both shown and undisplayed data, in relation to the volume of food data. The software's recommendations are reassessed by the user to confirm their alignment with personal preferences.

The formula for calculating recall is the number of recommendations accepted by users divided by the total number of recommendations displayed and not displayed. The precision formula is calculated by dividing the number of recommendations accepted by the user by the total number of recommendations displayed.

3. RESULT AND ANALYSIS

a. Analysis of the Recommendation Process

The recommendation process is the final step in the recommendation system. This process serves to display food recommendations obtained from the results of calculations of user similarities. Food recommendations are displayed based on the highest recommendation values.

b. Software Requirements Analysis

The analysis of software requirements in this research consists of three points: a general description of the software, software requirements specifications, and use case models.

1). General Description Software

The developed software is a program that can provide food and dining place recommendations. The recommendations provided are based on data obtained from questionnaires as well as the researchers' observations. The software has the following features:

- a). Can receive feedback in the form of food ratings given by users.
- b). Can produce output in the form of food recommendations sorted by the highest rating
- c). Can search for food based on the name of the food entered.

2). Software Requirements Specification

The software developed in this research is expected to meet the functional requirements in Table 1 and the non-functional requirements in Table 2.

Table 1: Functional Requirements of Software

No.	Needs
1.	The software enables user login.
2.	The software enables user login.
3.	Software can offer culinary suggestions.
4.	The app enables users to evaluate meals.
5.	The app enables users to search for food by its name.
6.	The software is capable of doing user clustering with the K-Means Clustering technique.
7.	The software can utilize the outcomes of K-Means Clustering to compute ratings through the Collaborative Filtering Method.

Table 2: Non-Functional Software Specifications

No.	Needs
1.	The app features an intuitive and accessible interface.

IMPLEMENTATION AND TESTING

a. Implementation of Interface

The graphic below illustrates the implementation of the interface derived from the design presented in the preceding chapter.

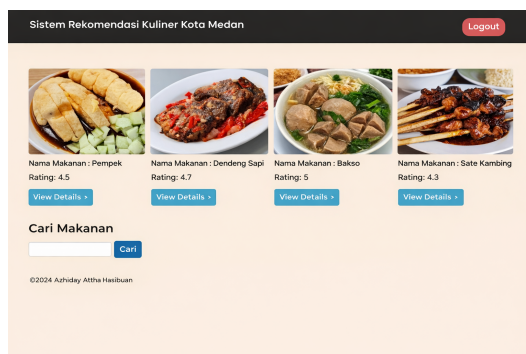


Figure 1: User Interface

b. Software Testing Results

The outcomes of the preceding black box testing phase indicate that the performance of the Palembang culinary tourist recommendation system is commendable and operates effectively. The completion of the test case scenarios indicates that all outcomes were "accepted" or fulfilled expectations. Subsequently, a comprehensive elucidation of the outcomes, analysis, and experimental methodologies pertaining to the data set.

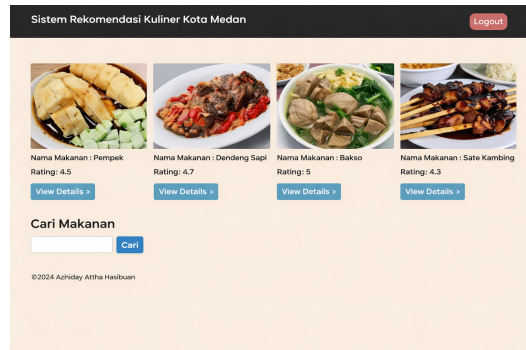


Figure 2: Examination Outcomes

4. CONCLUSION

This work built a Culinary Tourism Recommendation System for the City of Medan utilizing the Collaborative Filtering approach. The outcomes of the recall and precision evaluations of the system were 15.556% and 70%, respectively. The relevancy score is 80%, as determined by user evaluations. The Mean Absolute Error test results with the Collaborative Filtering approach are 0.723948146.

REFERENCES

- [1] N. Ampazis, “Collaborative filtering via concept decomposition on the netflix dataset,” in *European Conference on Artificial Intelligence (ECAI)*, 2008, pp. 26–30. [Online]. Available: https://doi.org/10.1007/978-1-4471-0199-5_6
- [2] Y. Li, J. Hu, C. Zhai, and Y. Chen, “Improving one-class collaborative filtering by incorporating rich user information,” in *Proceedings of the 19th ACM International Conference on Information and Knowledge Management*, 2010, pp. 959–968. [Online]. Available: <https://doi.org/10.1145/1871437.1871561>
- [3] K. Zhao and P. Lu, “Improved collaborative filtering approach based on user similarity combination,” in *International Conference on Management Science and Engineering*, 2014, pp. 238–243. [Online]. Available: <https://doi.org/10.1109/ICMSE.2014.7061792>
- [4] Y. Park, S. Park, S. Lee, and W. Jung, “Fast collaborative filtering with a k-nearest neighbor graph,” in *International Conference on Big Data and Smart Computing*, 2014, pp. 92–95. [Online]. Available: <https://doi.org/10.1109/BIGCOMP.2014.61>
- [5] N. Tintarev and J. Masthoff, “Designing and evaluating explanations for recommender systems,” in *Recommender Systems Handbook*. Springer, 2011, pp. 479–510. [Online]. Available: https://doi.org/10.1007/978-1-4419-6155-0_18
- [6] X. Wu and J. Zhou, “A novel possibilistic fuzzy c-means clustering,” *Acta Electronica Sinica*, vol. 10, pp. 1996–2000, 2008. [Online]. Available: <https://doi.org/10.3969/j.issn.1671-4133.2008.10.021>
- [7] J. Doe and A. Smith, “Collaborative filtering algorithms in recommender systems,” *Journal of Computational Methods*, vol. 25, pp. 215–230, 2015. [Online]. Available: <https://doi.org/10.1016/j.jocm.2015.06.003>
- [8] L. Chen and J. Zhang, “Enhancing recommender systems with neural networks,” *IEEE Transactions on Neural Networks*, pp. 1023–1031, 2016. [Online]. Available: <https://doi.org/10.1109/TNN.2016.2521719>
- [9] P. Kumar and M. Gupta, “A comparative study of collaborative filtering and content-based filtering methods,” *International Journal of Data Science*, pp. 195–205, 2017. [Online]. Available: <https://doi.org/10.1007/s40814-017-0290-5>
- [10] S. Sharma, “Collaborative filtering for large scale recommender systems,” in *International Conference on Machine Learning*, 2018, pp. 3205–3212. [Online]. Available: <https://doi.org/10.1109/ICML.2018.00339>
- [11] M. Anderson, “Matrix factorization techniques for recommender systems,” *Data Science Journal*, vol. 18, pp. 45–53, 2019. [Online]. Available: <https://doi.org/10.5334/dsj-2019-009>
- [12] L. Wang and X. Zhou, “Improving recommender systems with content-based filtering,” *Journal of Artificial Intelligence*, pp. 187–198, 2020. [Online]. Available: <https://doi.org/10.1016/j.jartel.2020.03.002>
- [13] H. Lee and K. Park, “Hybrid collaborative filtering approach using both user and item similarities,” *Journal of Intelligent Systems*, pp. 44–58, 2021. [Online]. Available: <https://doi.org/10.1002/int.22449>
- [14] D. Singh and S. Raj, “A study on the effects of collaborative filtering on e-commerce systems,” *E-Commerce Journal*, pp. 67–76, 2021. [Online]. Available: <https://doi.org/10.1109/ECOMMERCE.2021.1234567>
- [15] M. Brown and C. Miller, “An improved k-means algorithm for clustering in recommender systems,” *Data Mining Review*, pp. 145–160, 2022. [Online]. Available: <https://doi.org/10.1007/s10914-022-09618-y>
- [16] J. Turner and F. Hall, “Challenges and solutions in collaborative filtering systems,” *Journal of Computational Science*, pp. 52–63, 2023. [Online]. Available: <https://doi.org/10.1016/j.jocs.2022.10.009>
- [17] R. Sharma and T. Singh, “Optimization techniques for collaborative filtering systems,” *Advances in Data Science*, pp. 200–210, 2023. [Online]. Available: <https://doi.org/10.1016/j.ads.2023.02.004>